


Vector Frame Light Box 10x8

VF-LB-R-10x8

Vector Frame™ fabric light boxes feature durable 100mm aluminum extrusion frames, push-fit back-lit fabric graphics and LED top and bottom lighting. Single and double-sided graphic options are available. LED lights come adhered to the frame, making set-up as simple as assembling the frame, applying the push-fit graphics and plugging in the electrical cord!

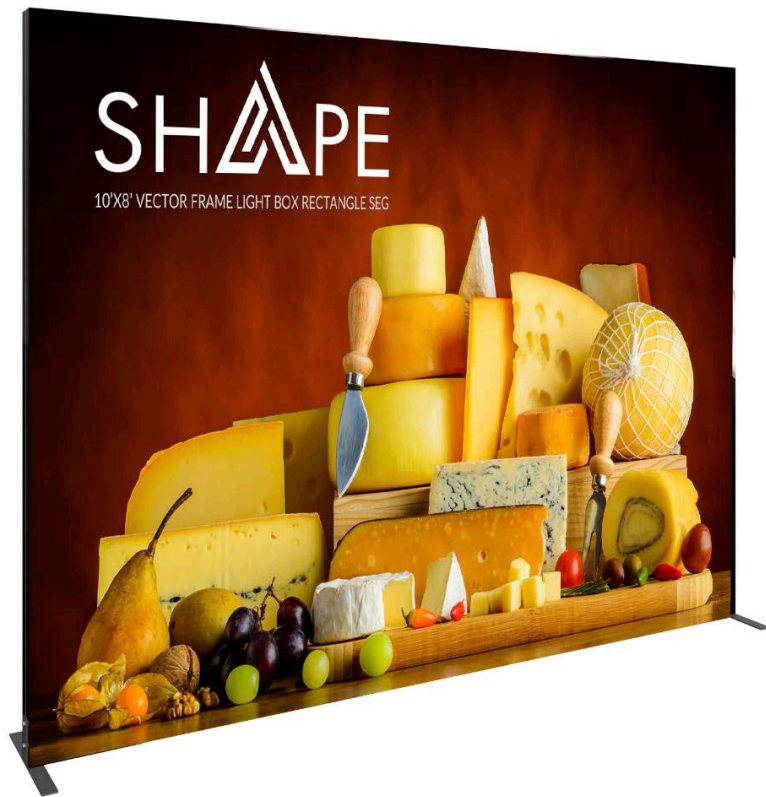

features and benefits:

- 100mm (4") silver extrusion frame
- Integrated LED lighting strips top & bottom
- Single or double-sided push-fit fabric graphics
- Easy assembly
- Comes packaged with one OCH wheeled molded case for transport and storage
- Lifetime hardware warranty against manufacturer defects

dimensions:

Hardware

Assembled unit:
119"w x 94.7"h x 19.7"d
3023mm(w) x 2405mm(h) x 500mm(d)

Approximate weight with cases:
95 lbs / 43 kgs

Shipping

Packing case(s):
1 OCH

Shipping dimensions:
50"l x 29"h x 12"d
1270mm(l) x 737mm(h) x 305mm(d)

Approximate total shipping weight
(includes cases & graphics):
99 lbs / 45kgs

additional information:

Graphic material:
Backlit Intensity push-fit fabric graphics

When included in a larger kit, a different packaging solution will be listed to accommodate all contents of the kit. Individual packaging no longer provided.





This product may include the following materials for recycle:
aluminum, select wood, fabric, cardboard, paper, steel, and plastics.


1 person assembly recommended /
2 person graphic application recommended:



We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

*Not to scale

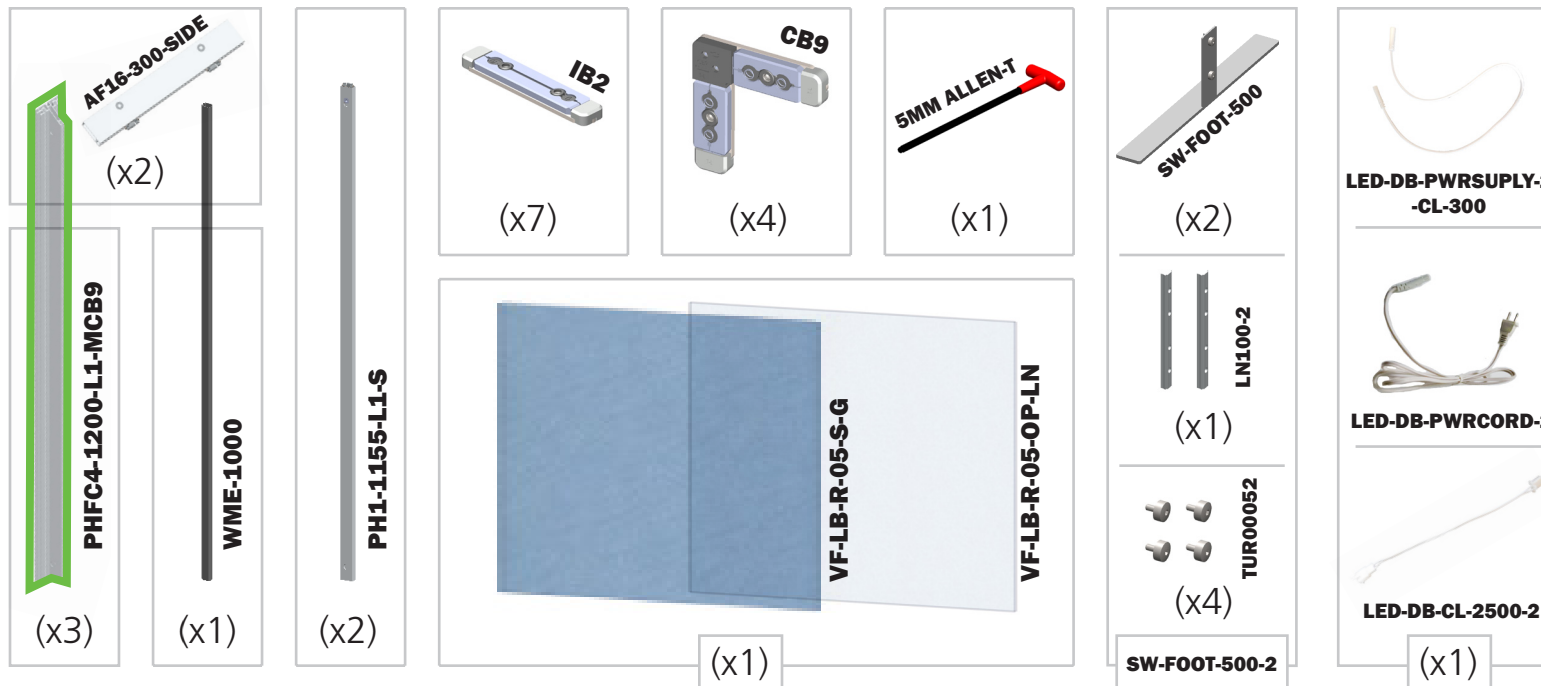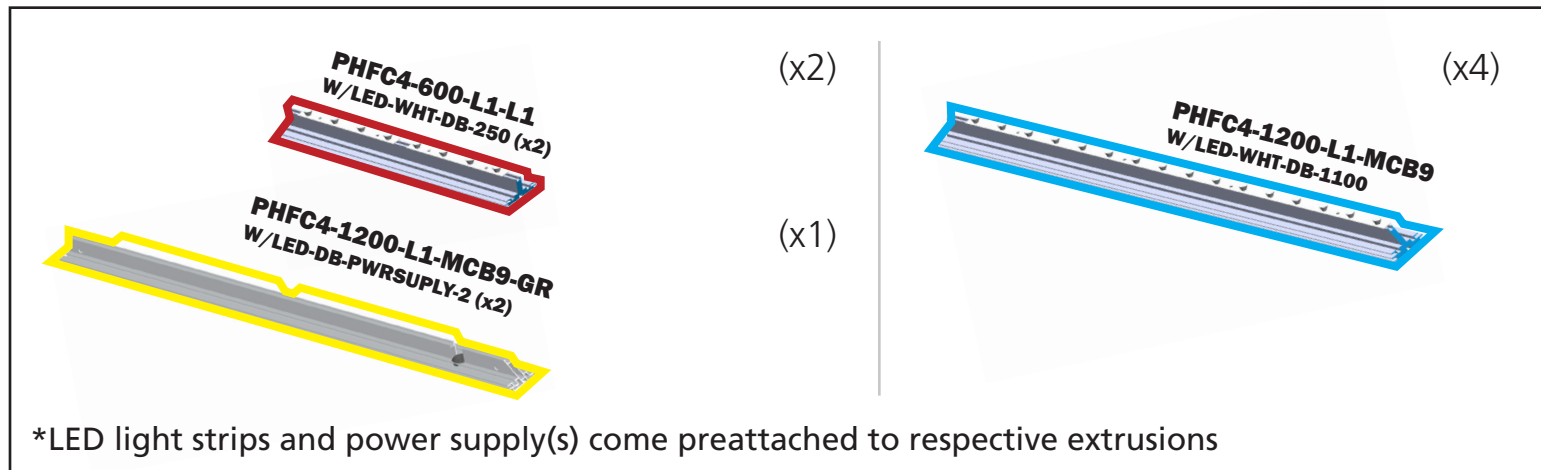

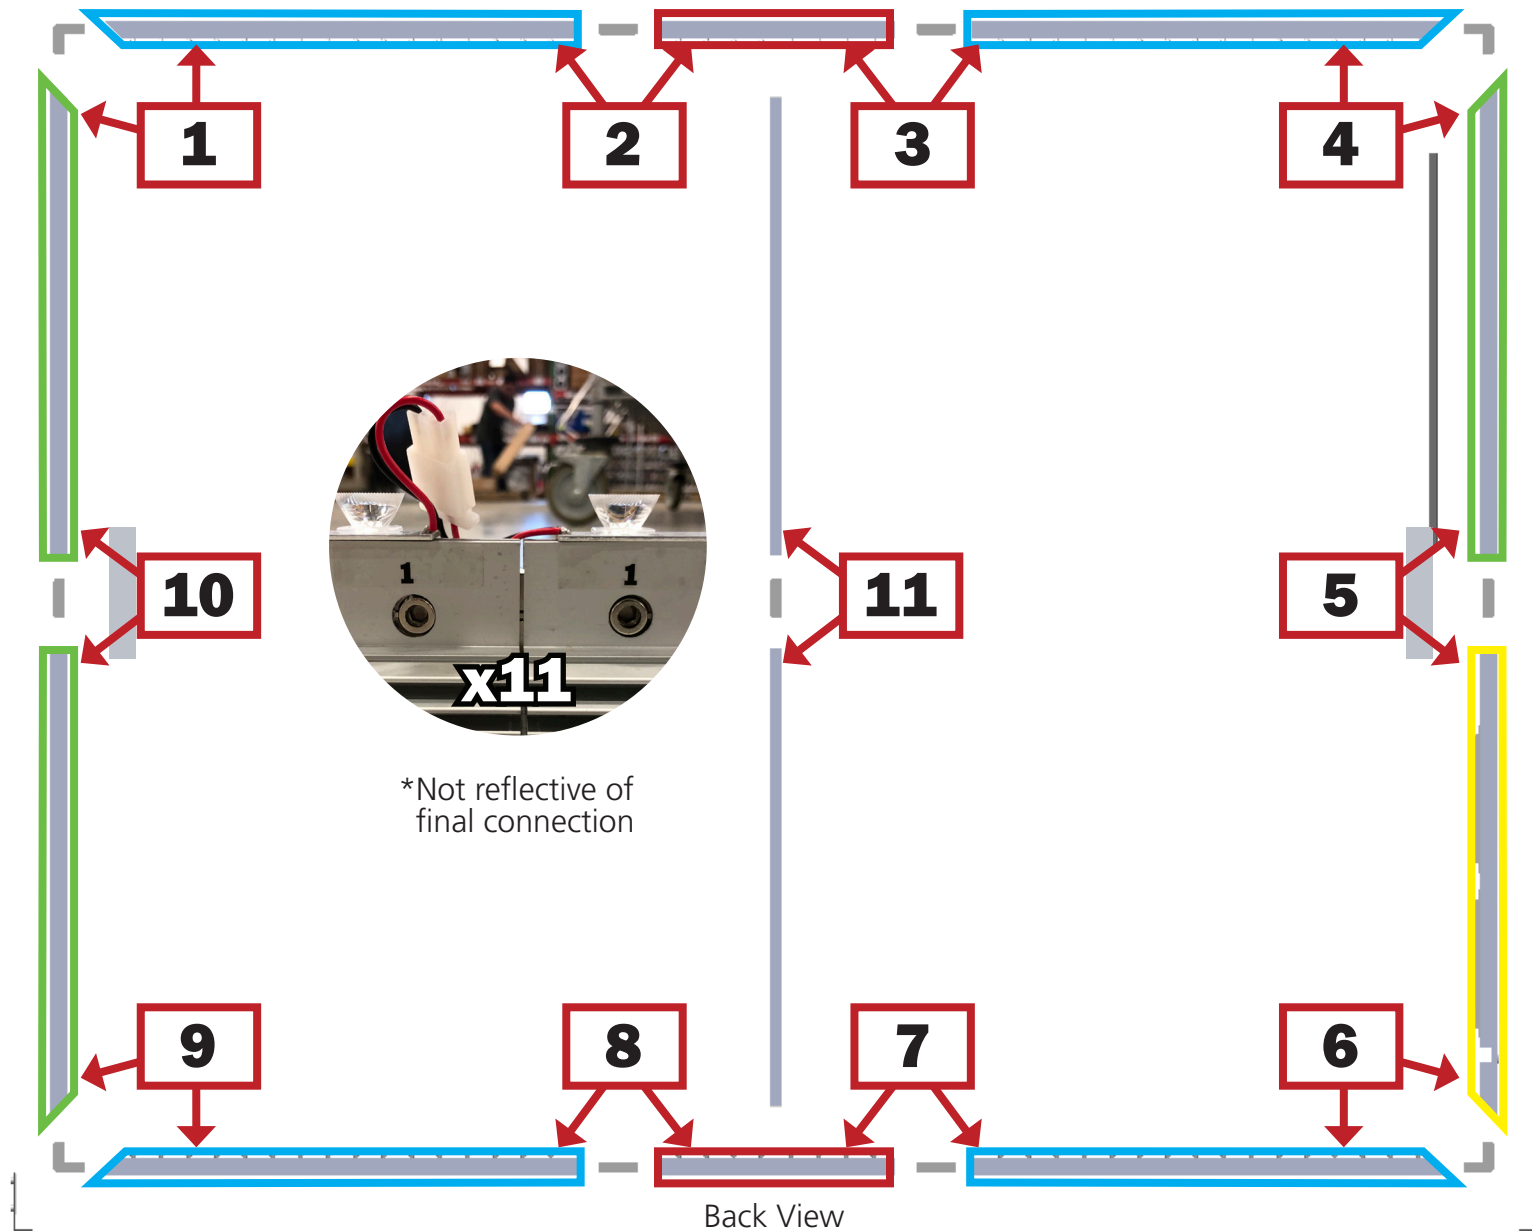

CB9

IB2

IB2

CB9

CB9

AF16

IB2

AF16

IB2

IB2

AF16

IB2

*CB9 & IB2 connection
are consistent


CB9

IB2

IB2


CB9



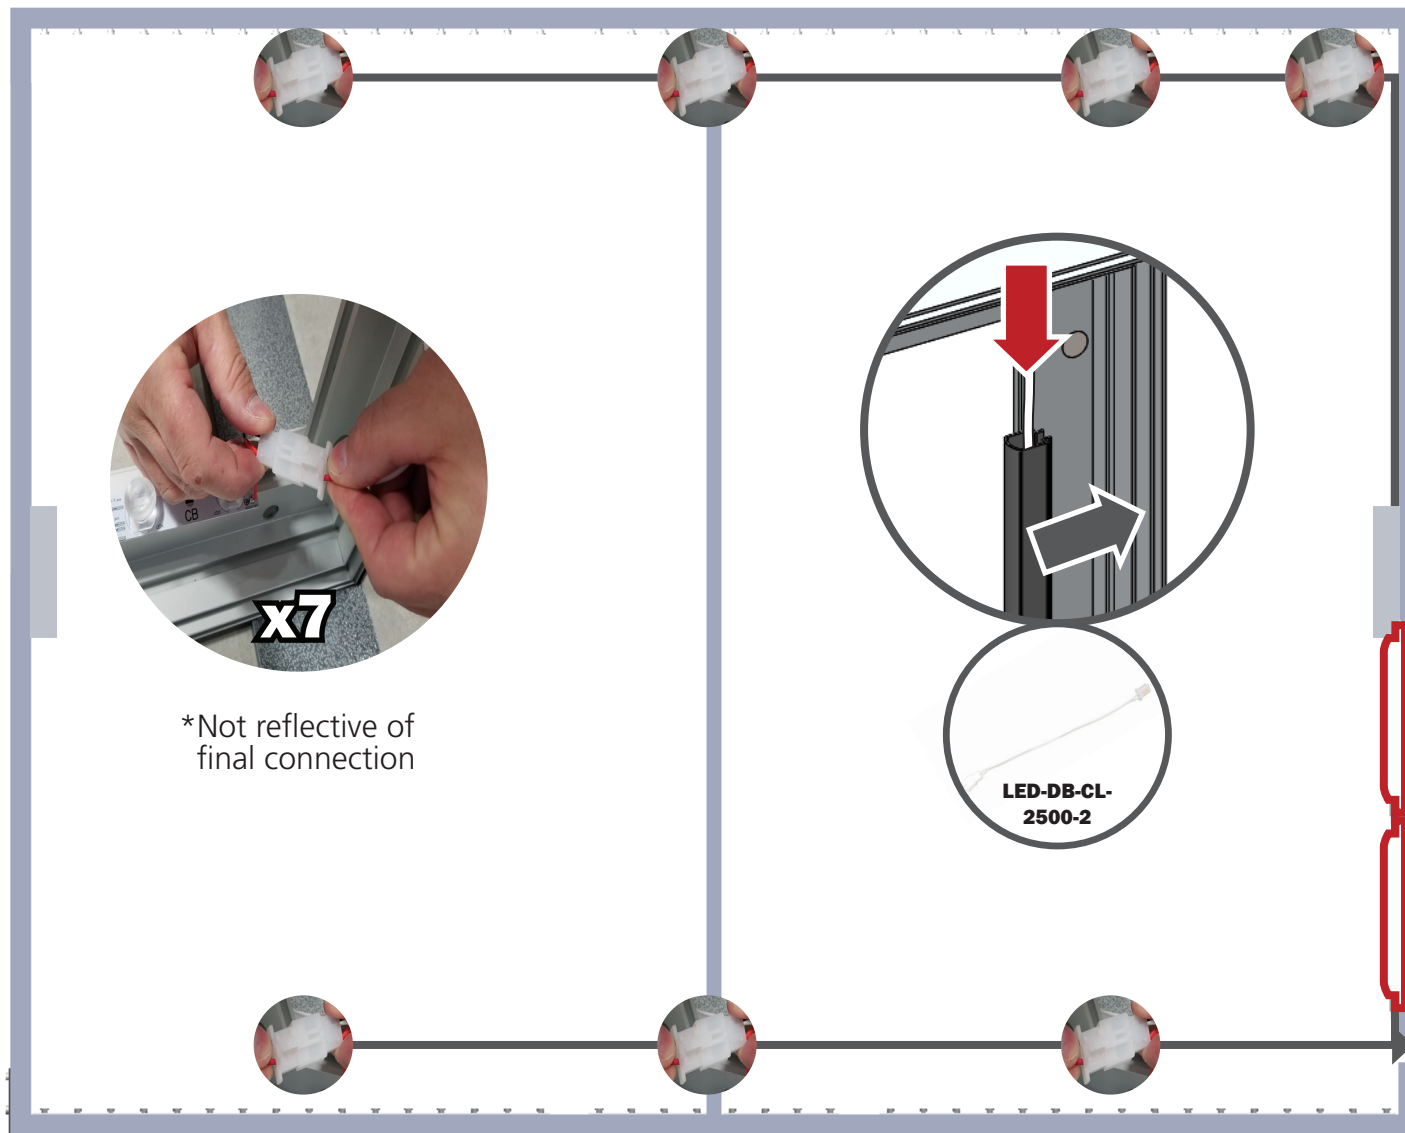


x7


*Not reflective of final connection

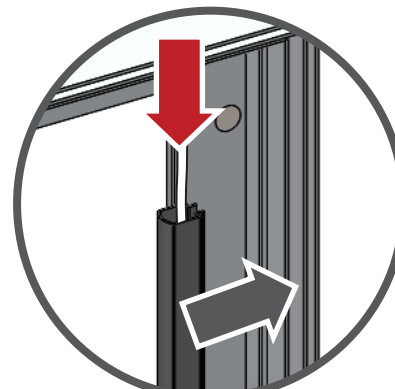

LED-DB-CL-2500-2





LED-DB-PWRSUPPLY-2-CL-300

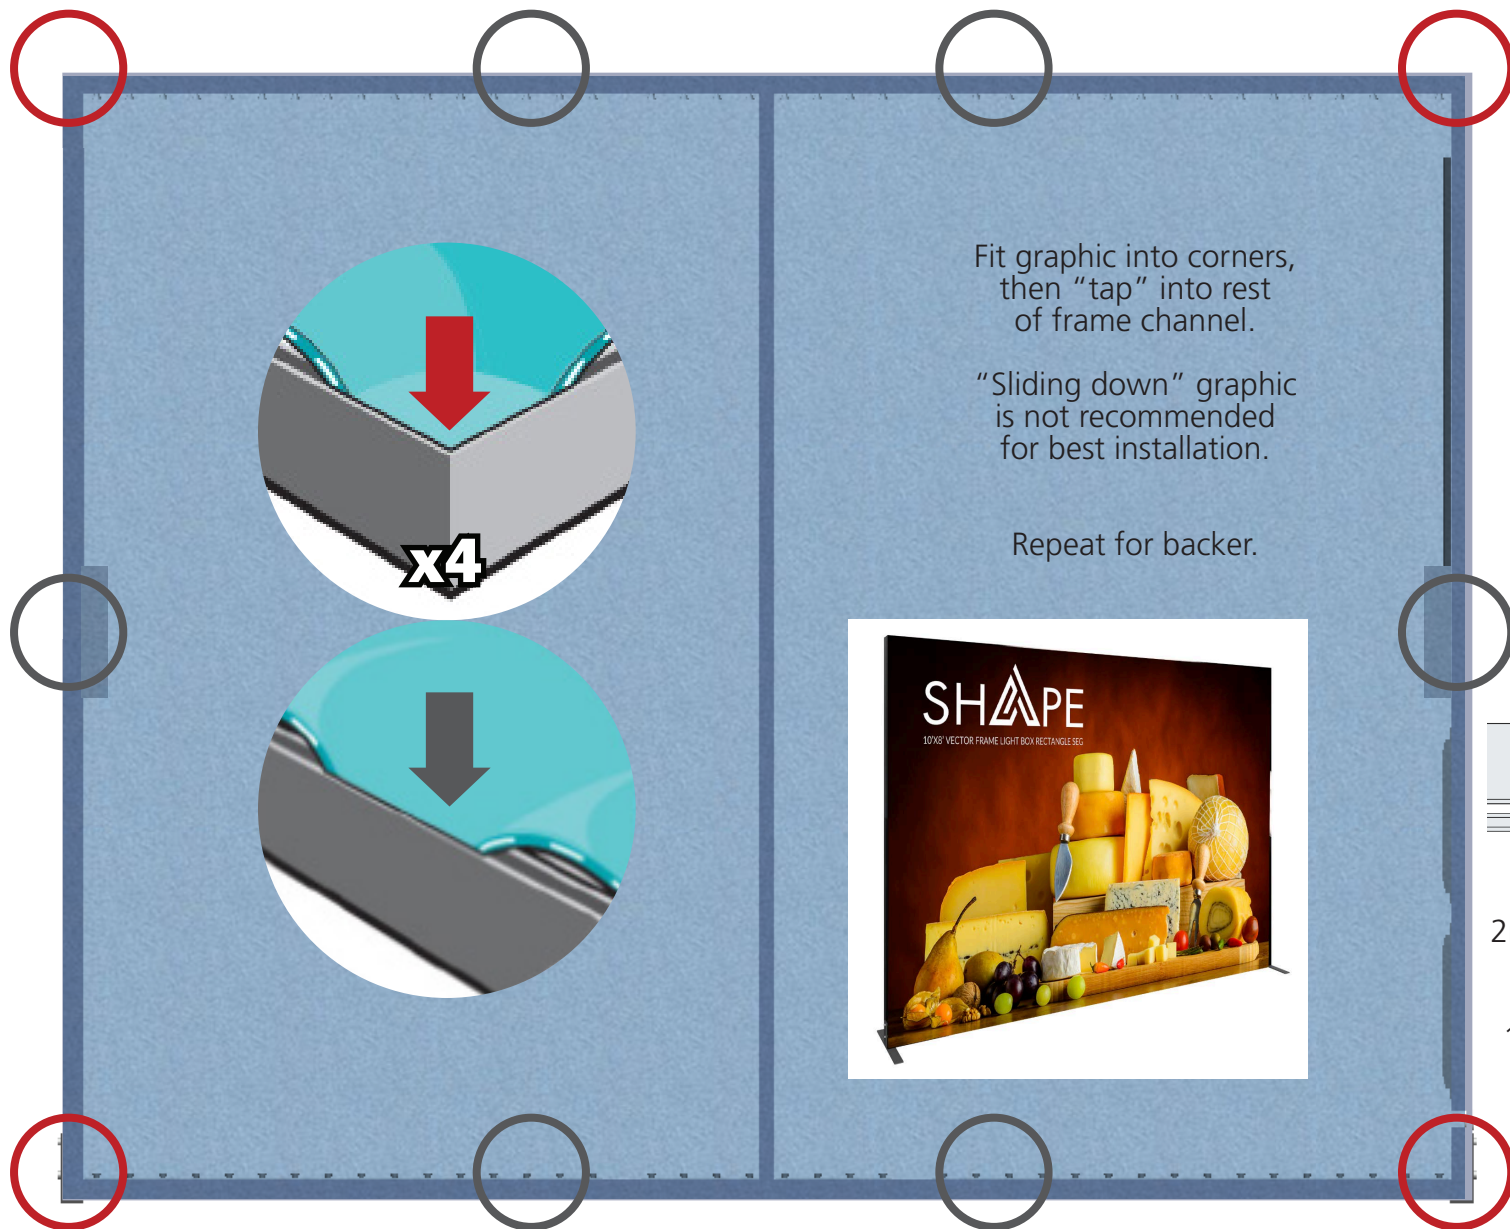

Fit graphic into corners,
then "tap" into rest
of frame channel.

"Sliding down" graphic
is not recommended
for best installation.

Repeat for backer.

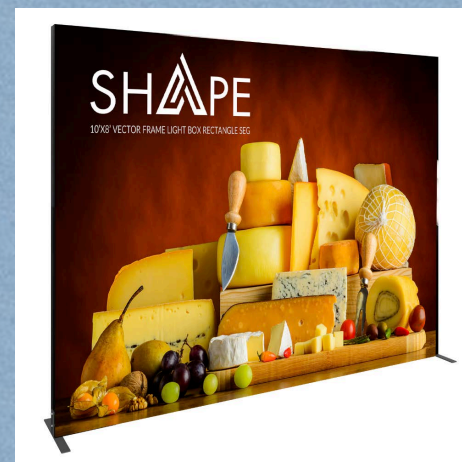

Backer
2nd channel

Graphic
1st channel